

THE JUNIPER V2500 SHORT ENGINE WASH PROBES

JMP/V2500/D/4040

(Supplied as set of two)


Fitment Guide



AIRCRAFT SERVICE EQUIPMENT




PROBE ASSEMBLY: Main points and connection to twin hose assembly.

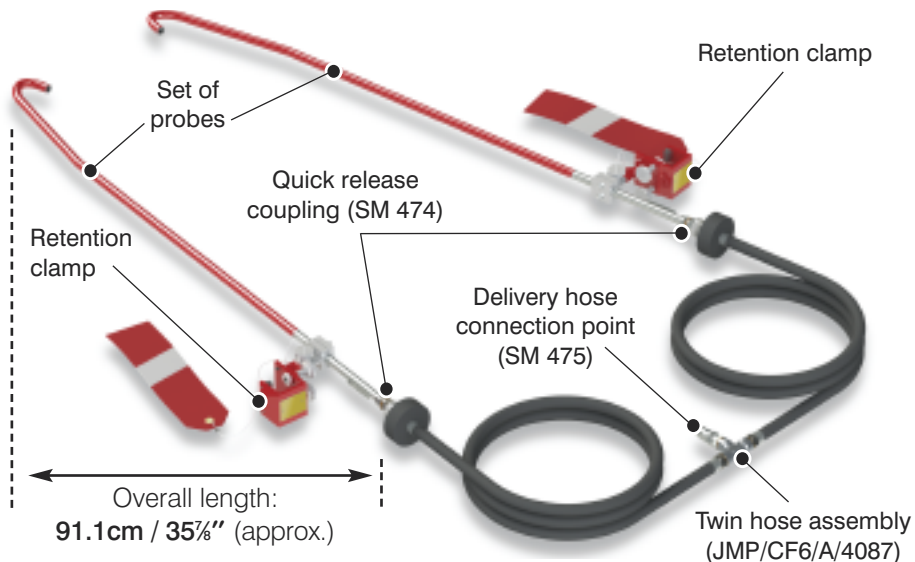

PROBE CARE: Looking after your wash probes

CAUTION: The probes should be handled carefully and stored in the following manner to avoid damage.

When returning probes to the correct compartment in the stowage box they should be placed 'top to tail' into the supplied equipment bag after draining them thoroughly.

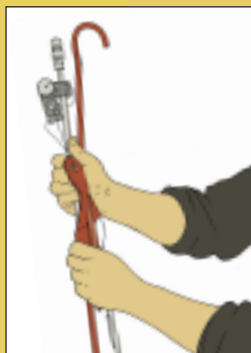


NOTE: Storage boxes are supplied in one of two standard sizes dependent on the size of probes ordered:

Small: (h) 39" x (w) 24" x (d) 15½"

Large: (h) 48½" x (w) 24" x (d) 15½"

STEP 1: Probe fitment to engine.

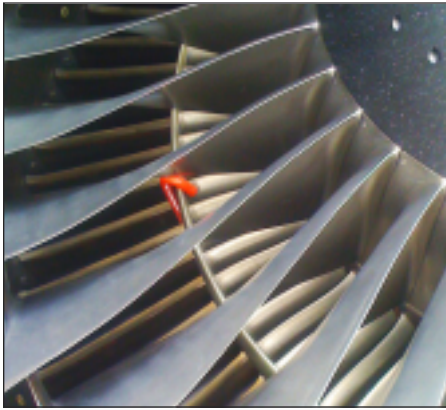


CAUTION:

Ensure that the engine fan is held securely during the fitting of the engine 'j' hook probes.

Separate the probe from the clamping bracket by unscrewing the locking knob and clamping screw.


Offer up the clamping bracket to the thrust reverser door ring and guide the probes through the fan outlet guide vanes (ogv's) from the aft end, at approximately the **4.00** and **8.00 o'clock** positions, aft looking forward.

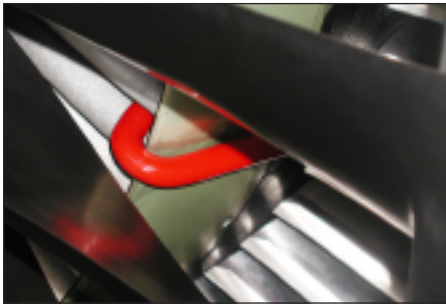


Tighten the clamping screws into the channel with the apex of the screws tip in the centre of the groove.

CAUTION:

Do not overtighten the screws.

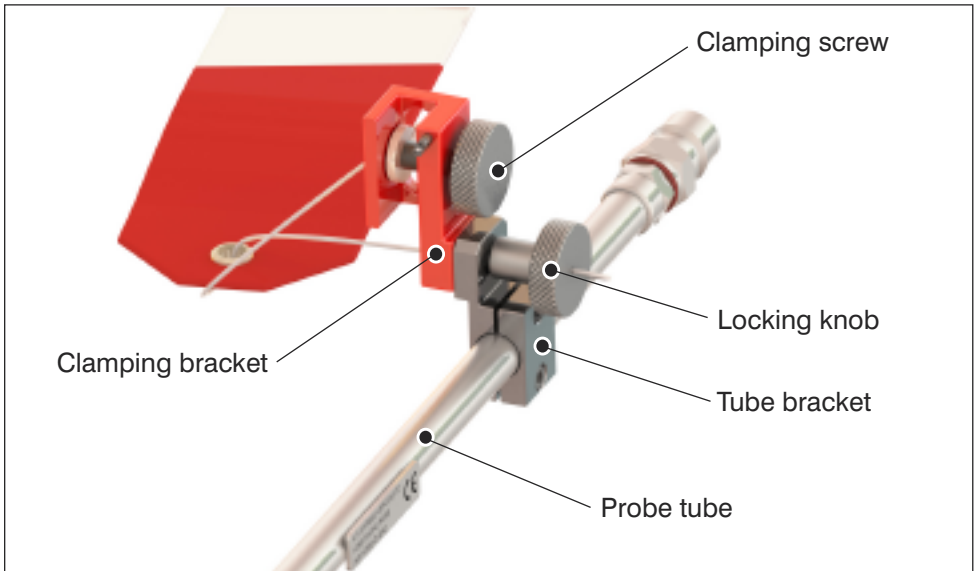

STEP 2: Probe fitment with thrust reverser doors open.

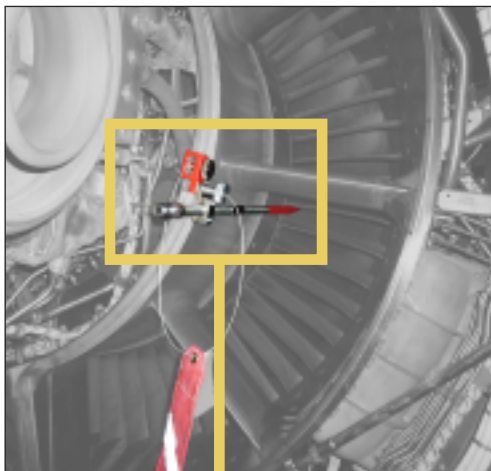

With the tube bracket above the tube locate the hole over the stud on the clamping bracket and 'hang' the probe off the clamping bracket. Replace the locking knob and tighten to secure the tube to the clamp.

Connect the twin hose assembly (provided with all compressor wash rigs) to both of the engine probes, making sure that the probes are attached securely to the engine with the hoses attached.

Connect delivery hose from the wash rig to the twin hose assembly.

Probe installation is now complete.

Please refer to the relevant AMM for flow rate information

Note: *The probes shown here are for illustrative purposes only and are not necessarily the actual probes featured.*

Contact details



Contractors to
H.M. Government Departments
Registered with ISO 9001:2015

A.T.Juniper (Liverpool) Limited Aircraft Service Equipment

Head Office:

Marshall Works, 5-17 Bleasdale Road, Allerton,
Liverpool L18 5JB, United Kingdom

Tel: +44 (0)151 733 1553

Fax: +44 (0)151 734 3166

Email: gse@juniper-liverpool.com


Web: www.juniper-liverpool.com

Also At:

Ash House, Prenton Way, North Cheshire Trading Estate,
Wirral CH43 3DU, United Kingdom

PROBE SPARES: Each kit contains replacement parts for a set of two probes.

Replacement **tubes**, **brackets** and **fittings** kits are available for these wash probes. The **tubes (red)** kit consists of the welded tube assembly with red vinylastic coating, ID plate and Tema quick-release coupling. The **bracket (blue)** kit consists of clamping brackets, warning pennants and talurit cables. The **fittings (orange)** kit consists of clamping knobs, warning pennants and talurit cables. The part numbers for each kit is below.

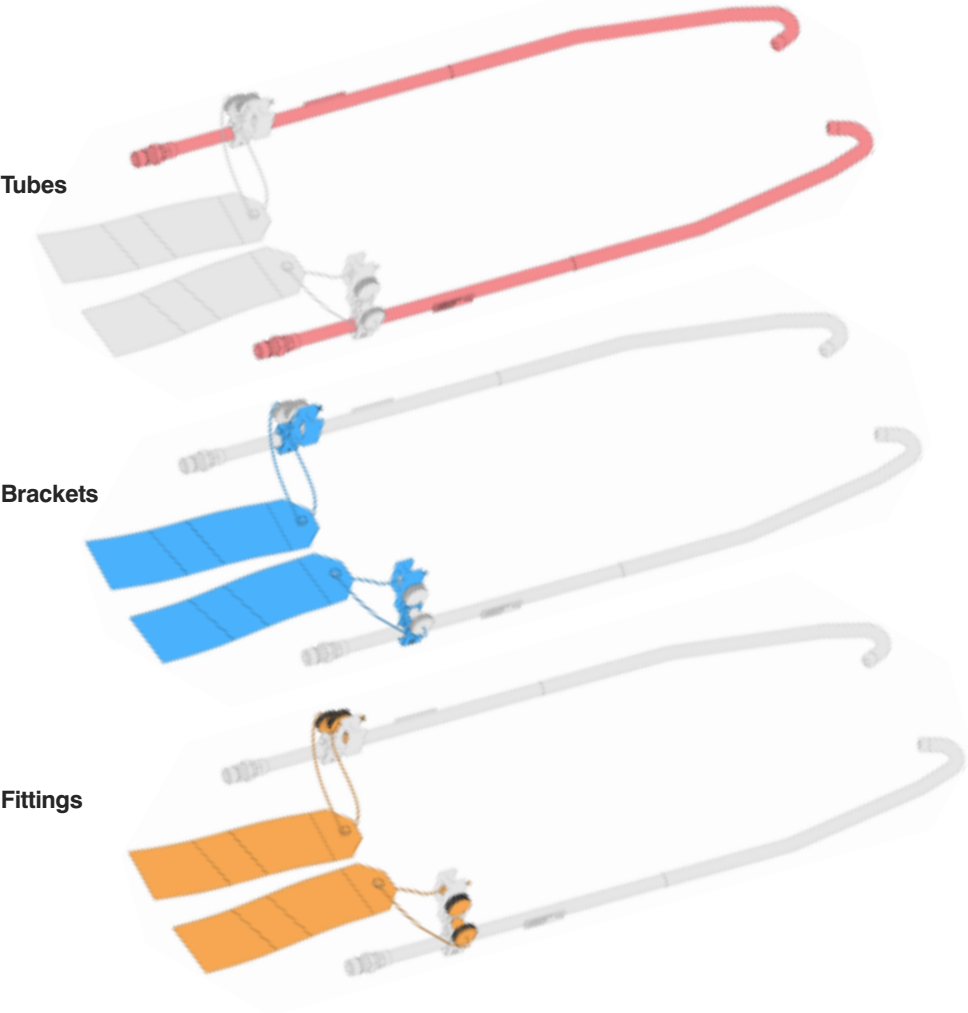

Probe tubes kit	JMP/V2500/D/4040/TUBES
Probe brackets kit	JMP/V2500/D/4040/BRACKETS
Probe fittings kit	JMP/V2500/D/4040/FITTINGS