

**THE JUNIPER
RB211-535E4 LONG
ENGINE WASH PROBES
JMP/RB211/D/6984**

(Supplied as set of two)


Fitment Guide




AIRCRAFT SERVICE EQUIPMENT



The RB211-535E4 long engine wash probes **JMP/RB211/D/6984**

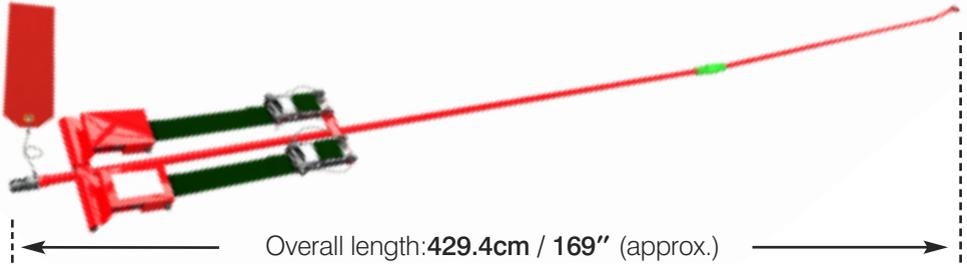



Delivery hose selection



When using RB211-535E4 long engine wash probes, turn the three way selector to position 'A' this ensures selection of the $\frac{3}{4}$ " bore delivery hose.

Please refer to the relevant AMM for correct flow rate information.

STEP 1: Assembling the probes

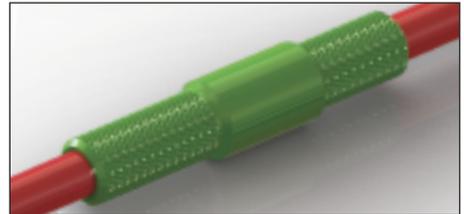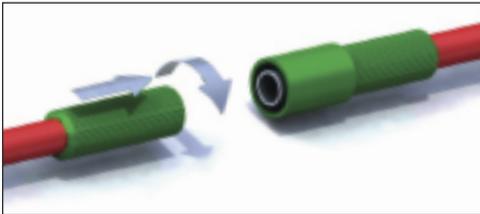


Connect probe halves by screwing together, ensuring a tight fit.

The screw connections require occasional greasing with an anti-seize compound such as Copaslip™ or equivalent grease. Take care not to get any compound in the bore of the connector.

Probes are supplied in sets of two and are identified by a red connection (port side) and green connection (starboard side).

STEP 2: Probe fitment

Caution: Ensure that the engine fan is held securely during the fitting of the engine 'j' hook probes.



*4 & 8 o'clock
seen from
rear of engine.*

Each probe to be inserted and fitted on the engine at approximately the **4 & 8 o'clock** positions so that the probe 'j' hook fits over the booster / fan splitter.

Guide the probes through the fan outlet guide vanes (ogv's) from the aft end, at approximately the **4 & 8 o'clock** positions, aft looking forward.

Insert each long probe carefully from the aft end & locate each tip so that it points between the booster inlet guide vanes into the booster and attach clamps. (See *STEP 3 for clamping instructions*).

Connect the twin hose assembly (provided with all compressor wash rigs) to both of the engine probes, making sure that the probes are attached securely to the engine with the hoses attached.

Connect delivery hose from the wash rig to the twin hose assembly.

Probe installation is now complete.

Please refer to the relevant AMM for flow rate information.





Probe fixed in position awaiting connection to the twin hose assembly.



Note: Images used in this guide are for illustrative purposes only and may not accurately represent the equipment in question.

STEP 3: Securing the spring clamps

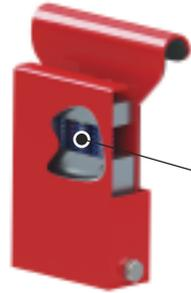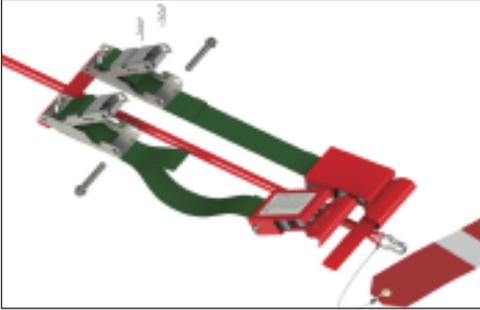

Spring clamps prevent over-tightening when fitting each probe.

Each probe has two spring loaded clamps which are tensioned by over centre buckle clamping devices.

To release each clamp, remove the safety clip and pin and open each clamp by pushing forward on the releasing mechanism.

This will allow the spring loaded clamp to be removed for relocation on the engine. Once relocated, pull gently on the strap and re-apply over the centre buckle.

Re-fit safety pin and clip - once the probe is inserted and located in the engine.

Connection to rig*



**Shown here are the CF6-80C2 long probes for illustrative purposes only.*

Contact details



Contractors to
H.M. Government Departments
Registered with ISO 9001:2015

A.T.Juniper (Liverpool) Limited

Aircraft Service Equipment

Head Office:

Marshall Works, 5-17 Bleasdale Road, Allerton,
Liverpool L18 5JB, United Kingdom

Tel: +44 (0)151 733 1553

Fax: +44 (0)151 734 3166

Email: gse@juniper-liverpool.com

Web: www.juniper-liverpool.com

Also At:

Ash House, Prenton Way, North Cheshire Trading Estate,
Wirral CH43 3DU, United Kingdom